




## DALI relay **datasheet**

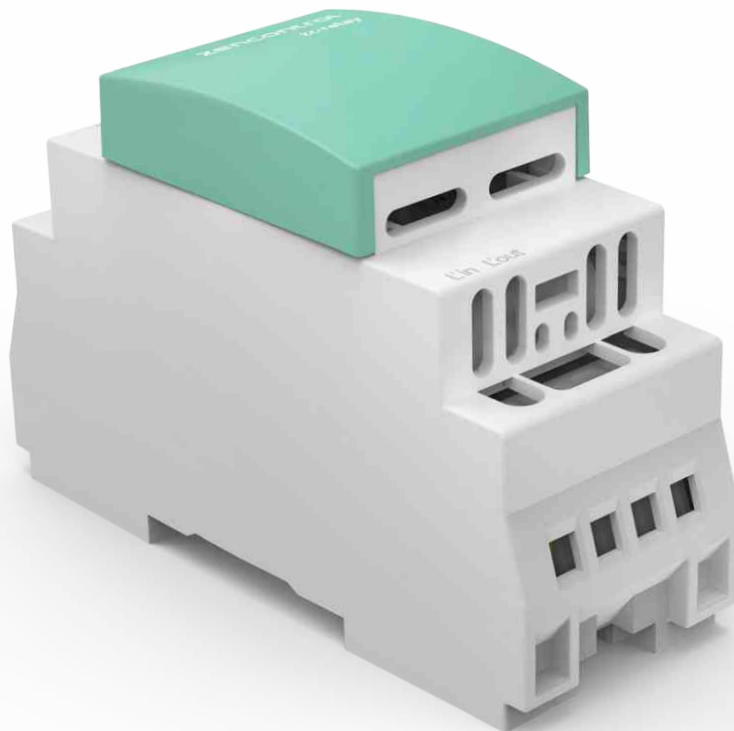

### Features

- Compliant DALI device type 7
- Compliant to IEC 62386-208
- Protected against DALI over-voltage
- 10 A dry contact mains rated relay output
- Working for up to 40,000+ relay operations
- Suitable for distribution board mounting on standard 35 mm DIN rail



### DALI device

Fully DALI compliant and compatible



### Relay rating

10 A dry contact volt-free mains rated relay output



### Long life

Working for up to 40,000+ relay operations




### High inrush

Protected against high inrush currents



## DALI relay datasheet



### Product range


**Order code** Description

**zc-relay** DALI volt-free relay, DIN mount

### Features

- For use with DALI control system
- Compatible with DALI and DALI-2
- Compliant to IEC 62386-208
- Protected against DALI over voltage
- Suitable for distribution board mounting on standard DIN rail
- Mains rated dry-contact volt-free relay output
- DALI device type 7

### Dimensions

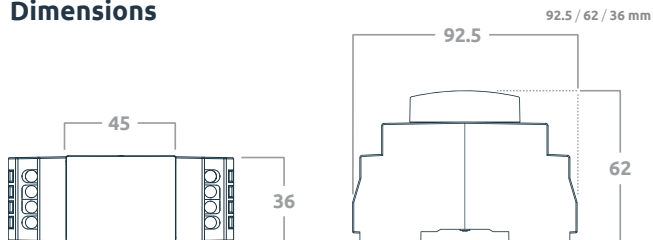

### Specifications

<b>Supply voltage</b>	230 V ~ 50 Hz
<b>Control system</b>	DALI
<b>DALI line current</b>	2 mA
<b>Output load</b>	10 A resistive 6 A inductive
<b>Output type</b>	Dry-contact volt-free relay
<b>Max. in-rush</b>	80 A
<b>Min. rated relay operations</b>	40 000
<b>Max. operations per hour</b>	360
<b>Relay type</b>	Non-latching normally open
<b>Wiring</b>	1 - 4 mm <sup>2</sup> Strip 6 - 7 mm
<b>Operating temperature</b>	0 to 45°C
<b>Material</b>	PC
<b>Classification</b>	Class II
<b>Mounting</b>	DIN rail (35 mm)
<b>Ingress protection</b>	IP20
<b>Compliance standards</b>	IEC 60669-2-1 CISPR 15 EN 55015 IEC 62386-208 EMC-2004/108/EC LVD-2006/95/EC